

# nRF Connect LTE Link Monitor v2.0.0

User Guide

# Contents

	Revision history. . . . .	iii
<b>1</b>	Introduction. . . . .	4
<b>2</b>	Installing the LTE Link Monitor. . . . .	5
<b>3</b>	LTE Link Monitor overview. . . . .	6
<b>4</b>	Viewing and sending AT commands. . . . .	9
<b>5</b>	Viewing modem events. . . . .	10
<b>6</b>	Managing credentials. . . . .	11
<b>7</b>	Sample code for locationapi.org. . . . .	12
	Legal notices. . . . .	14

# Revision history

Date	Description
2022-02-22	Updated the following topics to match nRF Connect LTE Link Monitor v2.0.0: <ul style="list-style-type: none"><li>• <a href="#">LTE Link Monitor overview</a> on page 6</li><li>• <a href="#">Viewing and sending AT commands</a> on page 9</li><li>• <a href="#">Viewing modem events</a> on page 10</li><li>• <a href="#">Managing credentials</a> on page 11</li></ul>
2021-06-02	Editorial changes
September 2019	Updated to match nRF Connect LTE Link Monitor v1.1.1: <ul style="list-style-type: none"><li>• Updated supported devices to include Thingy:91</li><li>• Updated <a href="#">Installing the LTE Link Monitor</a> on page 5</li><li>• Split <i>LTE Link Monitor functionality</i> into <a href="#">LTE Link Monitor overview</a> on page 6, <a href="#">Viewing modem events</a> on page 10, and <a href="#">Viewing and sending AT commands</a> on page 9</li><li>• Added <a href="#">Managing credentials</a> on page 11</li></ul>
May 2019	Updated <a href="#">Installing the LTE Link Monitor</a> on page 5
December 2018	Updated <i>LTE Link Monitor functionality</i> to reflect the <b>Periodic signal quality requests</b> option.
October 2018	First release

# 1 Introduction

LTE Link Monitor is a modem client application that monitors the modem/link status and activity using AT commands.

See the [nRF91 AT Commands Reference Guide](#) for the AT commands that are supported by the modem in nRF91 Series devices.

LTE Link Monitor is implemented as an app for the [nRF Connect for Desktop](#) application.

## Supported devices

- nRF9160 DK (PCA10090)
- Thingy:91 (PCA20035)

This video tutorial gives you an overview of the nRF Connect LTE Link Monitor:

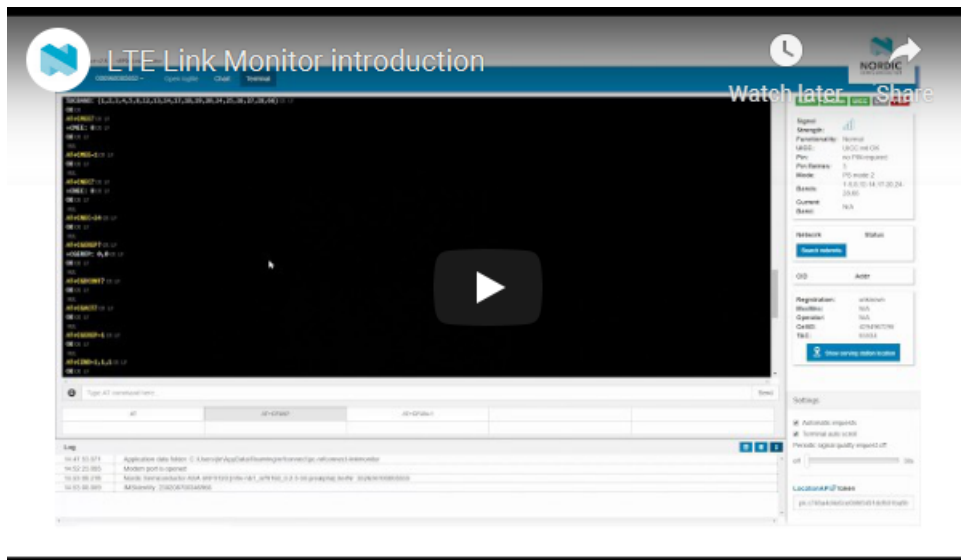


Figure 1: YouTube tutorial

# 2 Installing the LTE Link Monitor

The LTE Link Monitor is installed as an app for nRF Connect for Desktop.

Before you can install the LTE Link Monitor, you must download and install [nRF Connect for Desktop](#) (version 3.2.0 or later).

To install the LTE Link Monitor:

1. Open nRF Connect for Desktop.
2. Find the LTE Link Monitor in the list of apps and click **Install**.

Once the app is installed, you can launch it by clicking **Open**.

For easy access, you can create a desktop shortcut by clicking the **arrow down** button and selecting **Create shortcut**.

If a new version of the app becomes available, an **Update** button is displayed next to the **Open** button. Click this button to install the latest version. To uninstall the app, click the **arrow down** button and select **Uninstall**.

# 3 LTE Link Monitor overview

LTE Link Monitor displays information about connected devices and shows, for example, the signal quality, network information, and the AT communication with the modem.

After starting the LTE Link Monitor, the application window is displayed. It has the following elements:

### Main view

The main view displays the terminal view, chart view, or certificate manager, depending on your selection in the navigation bar.

### Navigation bar

The **SELECT DEVICE** drop-down menu in the navigation bar displays all supported devices. When you select a device, you can see live information about the current session in the main view. In the chart view, you can alternatively open a log file to load and display the log contents of a previous session.

**Note:** You cannot open a log file when a device connection is open.

Select the **Terminal** view to [display and send AT commands](#), the **Chart** view to [display modem events](#), or the **Certificate manager** to [manage credentials](#).

Select the **About** view to display information about the app or create a system report.




Figure 2: Navigation bar

**Side panel**

The side panel displays information related to the modem, network, and mobile cell.

The first line of indicators helps to visualize the connection state by displaying the indicators in different colors. Hovering over these indicators lists the possible colors and their meanings.

The following sections show information about the modem state, the network, the packet domain group, and the cell.

In the network group, only the connected network is listed automatically. Click **Search networks** to display a complete list of available networks. Be aware that this is a long and blocking operation.

If the connected cell can be resolved by the locationapi.org service, you can click **Show serving station location** to open a small map with the range of the serving station.

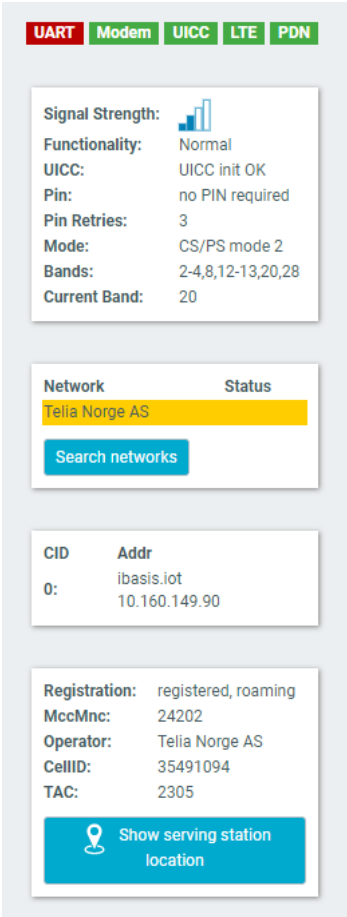


Figure 3: Side panel

## Settings

The **Settings** section of the side panel offers the following options:

- **Automatic requests:** Toggles whether LTE Link Monitor should automatically send a new request after receiving a response from the modem. This is required to gather the information that is listed in the side panel.

**Note:** Any information displayed in LTE Link Monitor is an interpretation of the responses from the modem. Therefore, turning off automatic requests affects the validity of the information.

- **Terminal auto scroll:** Toggles the terminal's auto-scrolling behavior.
- **Periodic signal quality requests:** Enable this option to send an [Extended signal quality +CESQ](#) command in a specified interval. Requires **Automatic requests** to be enabled.
- **LocationAPI token:** Used for accessing the online service. The initial token belongs to a free limited account, so it is recommended to create an account and change the token by following the link in the user interface.

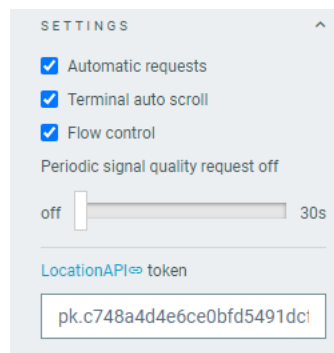


Figure 4: Settings

## Log

The log view at the bottom shows info and error level messages from the application. Click the **OPEN LOG FILE** button to view the full log file, which contains the complete AT communication with the modem.

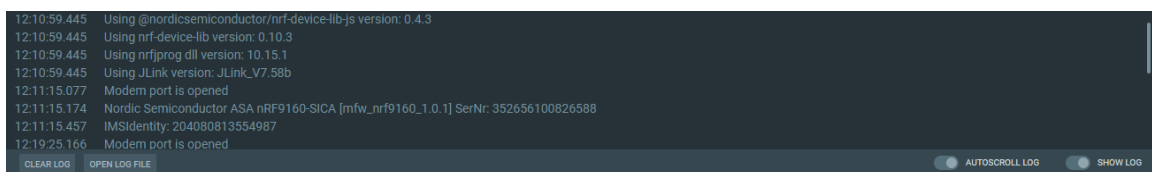


Figure 5: Log



# 4 Viewing and sending AT commands

Switch to the terminal view to see the AT communication with the modem and to send AT commands.

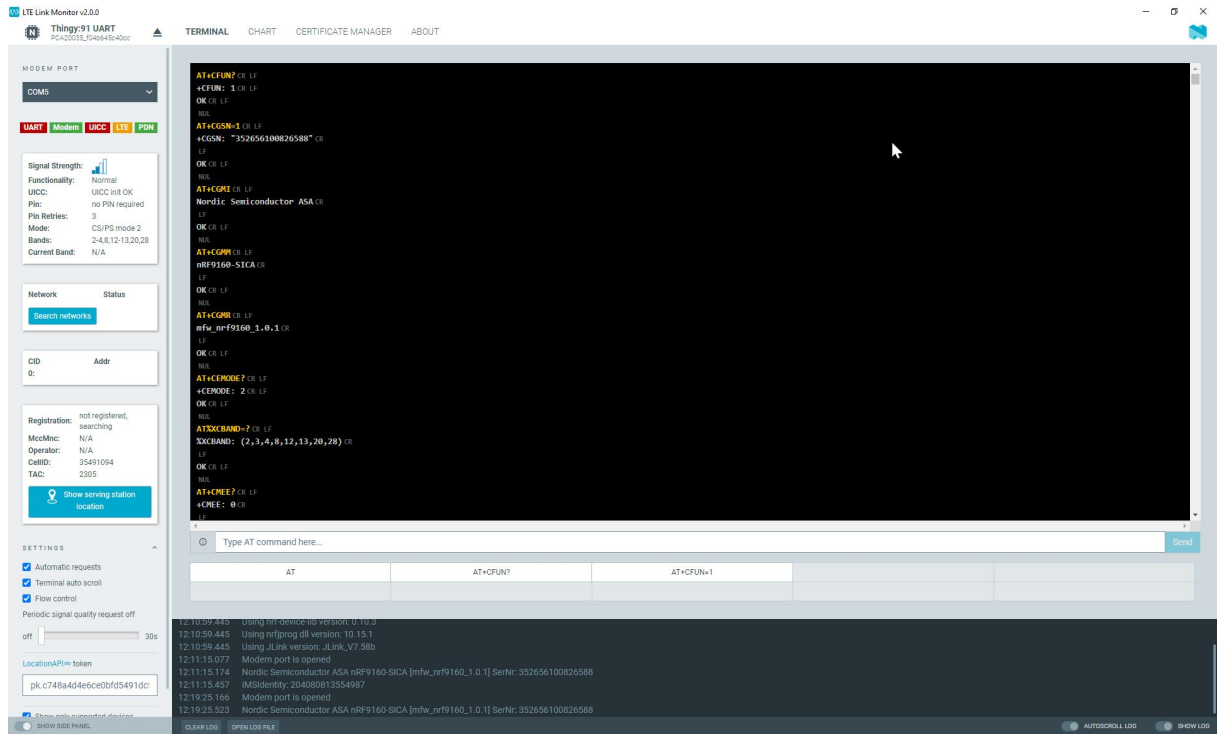


Figure 6: LTE Link Monitor terminal view

The terminal displays the AT communication with the modem. Colors are used to differentiate between transmitted commands (yellow), received responses (white), and received unsolicited results (light blue). The abbreviations of control characters are displayed in gray. They are, however, not selectable.

You can toggle the terminal's auto-scrolling behavior in the **Settings** section of the side panel.

To interact with the modem:

- Enter text in the command line located directly below the terminal and send it to the modem by pressing **Enter** or clicking **Send**.

The CR LF line ending is automatically appended to the line.

- Click the macro buttons below the command line to send their stored content to the modem.
- Configure the empty macro buttons with your frequently used commands.

To do so, select some text and drag and drop it onto one of the ten buttons.

# 5 Viewing modem events

Switch to the chart view to see modem events and signal quality, either for the connected device or for logged data.



Figure 7: LTE Link Monitor chart view

The time-based chart displays signal quality and modem events. The signal quality reported by the modem is the received signal reference power (RSRP) in dBm, displayed on the left axis. The modem events are unsolicited result codes and responses to different commands, separated into different categories displayed on the right axis.

To view the information in the chart:

- Hover over the events in the chart to display the list of events under the mouse cursor.
- To navigate the chart, drag it horizontally.
- Zoom in or out using the mouse wheel or the right mouse button.

**Note:** When you zoom or drag, the chart stops displaying the latest incoming events. Click **Live Scroll** under the chart to make sure incoming events are displayed again.

# 6 Managing credentials

You can store and update modem credentials (keys or certificates) manually by sending **Credential storage management %CMNG** commands to the modem. The certificate manager simplifies this process by offering a graphical user interface for updating credentials.

Before you can update the credentials stored by the modem, you must put the modem into offline state by sending the AT command **AT+CFUN=4**.

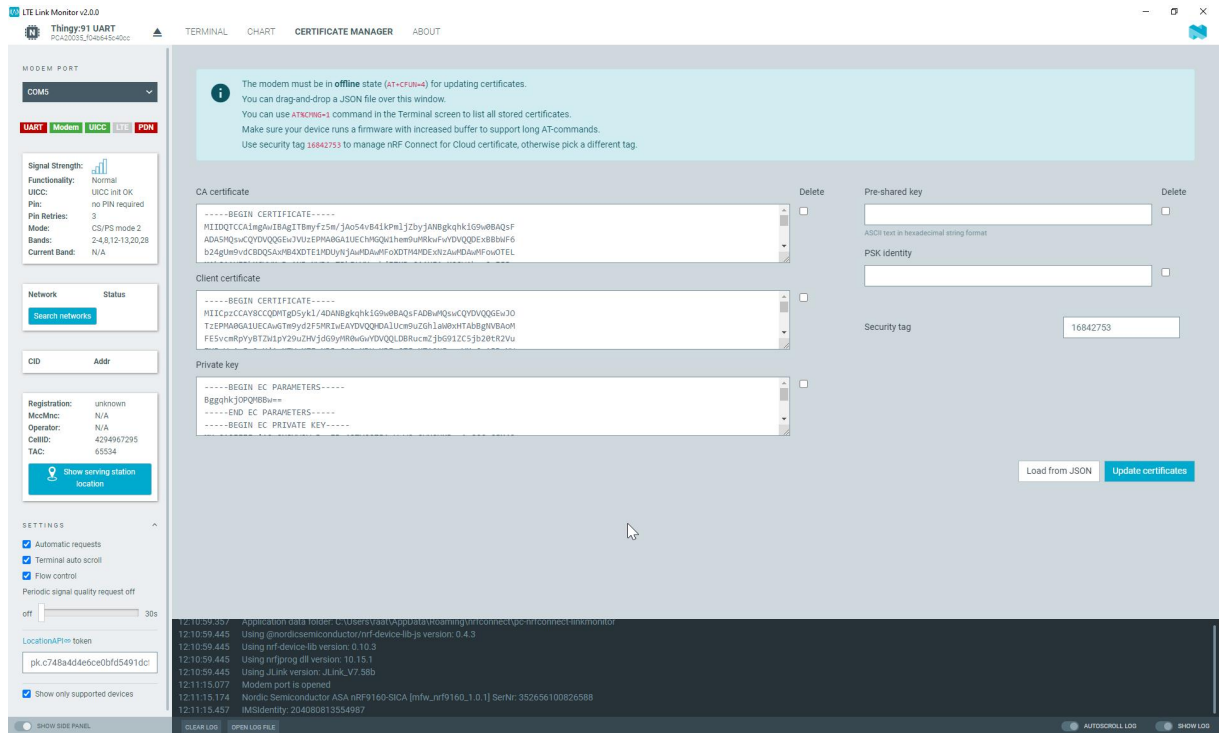


Figure 8: LTE Link Monitor certificate manager

Each set of keys and certificates that is stored in the modem is identified by a security tag. This means that all related credentials share the same security tag. Send the command **AT+CMNG=1** in the terminal view to display a list of all certificates that are stored on your device. If you have added your device in nRF Connect for Cloud, you should see a CA certificate, a client certificate, and a private key with security tag 16842753 (which is the security tag for nRF Connect for Cloud credentials).

To manage credentials:

- To add or update credentials, enter a security tag and the new key(s) or certificate(s). Then click **Update certificates**.

Instead of entering the credentials manually, you can also import a JSON file. To do so, click **Load from JSON**.

- To delete a key or certificate, select the check-box next to it. Then click **Update certificates**.

**Note:** Deleting the text from the text field does not cause the key or certificate to be unset.

# 7 Sample code for locationapi.org

The provided code snippet demonstrates the usage of the [locationapi.org](https://locationapi.org) service. You can use code similar to this in a client application, for example, a mobile app, to display a map showing the location of the device.

To see an example for using the locationapi.org service, click **Show serving station location** in the side panel of LTE Link Monitor.

## Note:

- This code only handles expected successful responses.
- The location request can be further enhanced for better accuracy by specifying neighboring cells, for which you can directly use the response to the **AT%NBRGRSRP** command.

```
const SerialPort = require('serialport');
const fetch = require('node-fetch');

const port = new SerialPort('COM8', {
  autoOpen: false,
  baudRate: 115200,
  dataBits: 8,
  parity: 'none',
  stopBits: 1,
});

let mcc;
let mnc;

// open the port and execute an AT+COPS? request
new Promise(resolve => port.open(resolve))
  .then(() => new Promise(resolve => {
    port.once('data', buf => resolve(buf.toString())).write('AT+COPS?\r');
  }))

// pick the 3rd argument of COPS response
.then(plmn => (/COPS: [0-2],[0-2],"([^\"]*)"\/.exec(plmn).pop()))
.then(mccmnc => {
  mcc = parseInt(mccmnc.substring(0, 3), 10);
  mnc = parseInt(mccmnc.substring(3), 10);
})

// execute an AT+CEREG? request
.then(() => new Promise(resolve => {
  port.once('data', buf => resolve(buf.toString())).write('AT+CEREG?\r');
}))

// pick the 3rd and 4th field from the response
.then(registration => (/CEREG: \d,\d+,"([0-9A-F]{1,4})","([0-9A-F]{1,8})"\/.exec(registration).slice(-2)))
.then(([tac, ci]) => ({
  lac: parseInt(tac, 16),
```

```
        cid: parseInt(ci, 16),
    )))

// construct the locationapi request
.then(({ lac, cid }) => ({
    token: 'pk.c748a4d4e6ce0bfd5491dcfb01ba9b10',
    radio: 'lte',
    mcc,
    mnc,
    cells: [{ lac, cid }],
    address: 1,
}))
.then(body => console.log(body) || body)

// fetch the result
.then(body => fetch('https://eu1.unwiredlabs.com/v2/process.php', {
    method: 'POST',
    headers: { 'Content-Type': 'application/json' },
    body: JSON.stringify(body),
}))
.then(response => response.json())
.then(console.log)
.then(() => process.exit());
```

# Legal notices

By using this documentation you agree to our terms and conditions of use. Nordic Semiconductor may change these terms and conditions at any time without notice.

## Liability disclaimer

Nordic Semiconductor ASA reserves the right to make changes without further notice to the product to improve reliability, function, or design. Nordic Semiconductor ASA does not assume any liability arising out of the application or use of any product or circuits described herein.

Nordic Semiconductor ASA does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. If there are any discrepancies, ambiguities or conflicts in Nordic Semiconductor's documentation, the Product Specification prevails.

Nordic Semiconductor ASA reserves the right to make corrections, enhancements, and other changes to this document without notice.

## Life support applications

Nordic Semiconductor products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury.

Nordic Semiconductor ASA customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Nordic Semiconductor ASA for any damages resulting from such improper use or sale.

## RoHS and REACH statement

Complete hazardous substance reports, material composition reports and latest version of Nordic's REACH statement can be found on our website [www.nordicsemi.com](http://www.nordicsemi.com).

## Trademarks

All trademarks, service marks, trade names, product names, and logos appearing in this documentation are the property of their respective owners.

## Copyright notice

© 2021 Nordic Semiconductor ASA. All rights are reserved. Reproduction in whole or in part is prohibited without the prior written permission of the copyright holder.

